

WALL PADDING

INDOOR

• Z-Clip

OUTDOOR

- Z-Clip
- Bolt








INDOOR WALL PE	ROTECTION PANELS
PART NO.	SIZE
260-14	1' x 4'
260-15	1' x 5'
260-16	1' x 6'
260-18	1' x 8'
260-24	2' x 4'
260-25	2' x 5'
260-26	2' x 6'
260-28	2' x 8'
260-46	4' × 6'
260-48	4' x 8'

*CUSOM SIZE PADS AVAILABLE **CUSTOM CUT-OUTS CAN BE MADE ACCORDING TO ACTUAL NEEDS


PADS CAN BE MADE WITHOUT 1" FLANGE

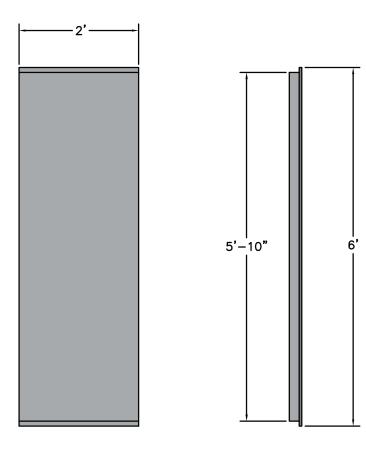

SCALE 1:1.5

EXAMPLE 2' X 6' PAD MODEL 260-26

CONSTRUCTION & FLANGE DETAIL

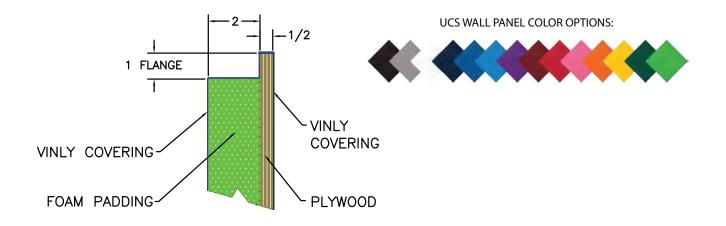



BACKING: 7/16" Structure wood

FOAM: 2" thick 100 ILD.

• FLAMABILITY STANDARD: NFPA 701 CLASS C - Meets Requirement.*

COVER: Double coated 21oz leather grain knife coated.vinyl fabric available in wide choice of colors. Vinyl fabric contains anti-bacterial & anti-fungal inhibitors, U.V. pigments, passes the California State Fire Marshall's Bulletin #117 flammability characteristics, and is tear resistant in excess of 90 psi.

- FLAMABILITY STANDARD: NFPA 701 CLASS A Meets Requirement.*
- 1" lip for easy installation on top and bottom of panel is standard
- Z-Clip Attachment system available for additional fee

CUTOUTS: SEWN Cutouts for utilities, corner pads and column pads are available.

GRAPHICS: UCS offers in house digital printing for its wall padding. All graphics are printed on our flat bed UV printer. Graphics are printed on colored vinyl to match order. UCS DOES NOT PRINT FULL COLOR ON WHITE VINYL TO PREVENT CRACKING AND FADING.

Part Numbers:

AL-DIE-ZCLIP

Description and Features:

Used to assist in the semi-permanent attachment of wall production panels both indoors and outdoors.

Construction:

Aluminum: 3" overall with 1.5" Lift-Off **Length:** Cut to size per project - stocked

in continuous length of 144"

Projection: 1/4"

Additional Hardware: MOUTING Owner supplied - appropriate to wall materials

Installation:

- Follow manufacturers instructions
- Check local codes
- UCS Offers Professional Installation subject to additional Charges








OUTDOOR WALL PANEL -**MODEL #266 SERIES**

RULE AND STANDARD COMPLIANCE


NCAA

Outdoor Wall Panel Sizes

A x B (feet)	Item Number
2 x 4	266-24-0001
4 x 4	266-44-0001
2 x 6	266-26-0001
4 x 6	266-46-0001
2 x 8	266-28-0001
4 x 8	266-48-0001

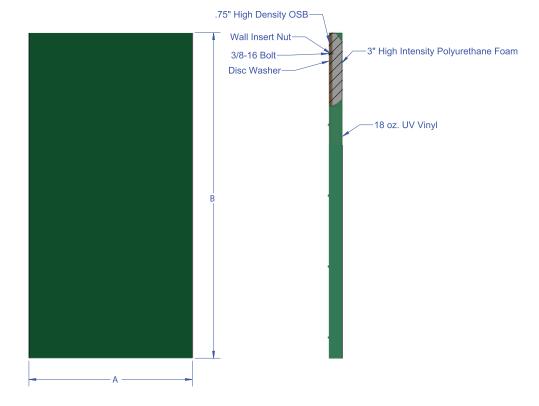

Typical bolt back pattern for 4' x 8' - Number of Attachment point may vary based on size of pad

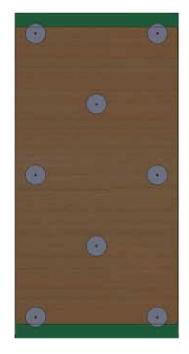

UCS WALL PANEL COLOR OPTIONS:



PROPRIETARY & CONFIDENTIAL









OUTDOOR WALL PANEL - MODEL #266 SERIES

RULE AND STANDARD COMPLIANCENCAA

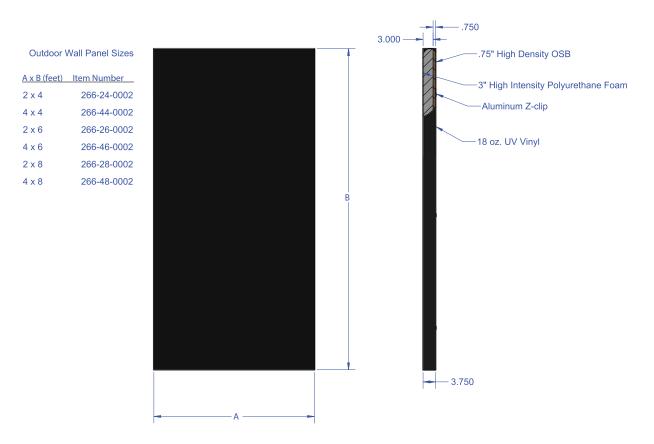

Typical Z-Clip Installation 4' x 8' Size - Number of Z-Clip Rows may vary based on overall pad height

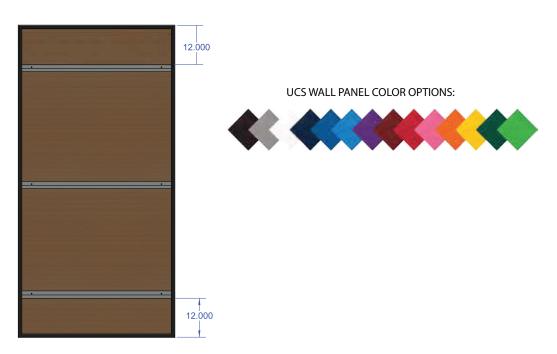

PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED ON THIS PAGE IS THE SOLE PROPERTY OF UCS, INC. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF UCS, INC., IS PROHIBITED.







OUTDOOR WALL PANEL -**MODEL #266 SERIES**

RULE AND STANDARD COMPLIANCE

NCAA



safety throughout an outdoor facility Outdoor Protection Panels made to Height and Width. (Custom Size Panels Available)

Standard Sizes include:

1'x4', 1'x 5', 1'x 6', 1' x 8', 2'x4', 2'x 5', 2'x 6', 2' x 8', 4' x 6', and 4' x8'

UCS can manufacture mats to be sized and fit around outlets, hose hookups, etc.



NCAA

Construction:

Wood Backing: 3/4" Sealed OSB Backer Primed on exposed side and all edges.

Foam: 3" High Density Polyurethane foam Vinyl: 19oz laminated vinyl available in wide choice of colors

Vinyl fabric contains anti-bacterial & anti-fungal inhibitors, U.V. pigments,

and is tear resistant in excess of 90 psi. 5-Year Manufacturers Warranty

Mounting System: Bolt Back System - Mini-

mum 8 Attachment points

Logos and Custom artwork is available (Subject to additional Charge)

Additional Hardware:

1/8" Galvanized Washers 4" x 4" Square 3/8" Zinc Plated Bolt

Installation:

Follow manufacturers instructions Check local codes UCS Offers Professional Installation subject to additional Charges

Guarantee:

5 Year Guarantee against defective materials and workmanship









4x8 Z-Clip Wall Panel

